User Manual

5“ AHD Monitor




Before using the product, please read this manual carefully and keep it for future reference.

● Specification


Screen size	5inch
Aspect ratio	16:9
Resolution	800*R.G.B*480
Video	3 channels 1080P/720P/ CVBS video input
Audio	2 way audio input (CH1-CH2)
Trigger control	3CH trigger control
Display mode	Single image display
System	PAL/ NTSC automatically
Voltage	12V-24V
Bootup time	2S
Storage temperature	-30~+85 ºC
Working temperature	-20~+70 ºC
OSD menu	Brightness, Contrast, Saturation, Volume, Screen filp, Language, Reverse Delay
Accessories	Power cable, Remote Control, Bracket, User manual

● Monitor panel introduction

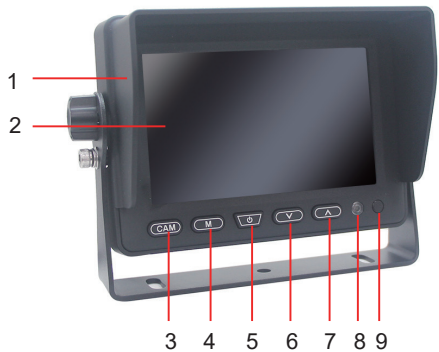


1. Sunshade
2. Display Screen
3. Channel Switch / Select Setting Item
4. Enter Menu / Switch Menu
5. Power On/Off
6. Volume Down / Value Decrease
7. Volume Up / Value Increase
8. Auto Dimming Window
9. Remote Window

● Remote Control



1. Power on-off key
2. Channel 1/channel 2 shift
3. Analog+
4. Menu key
5. Analog-
6. Mode selection

● Connection

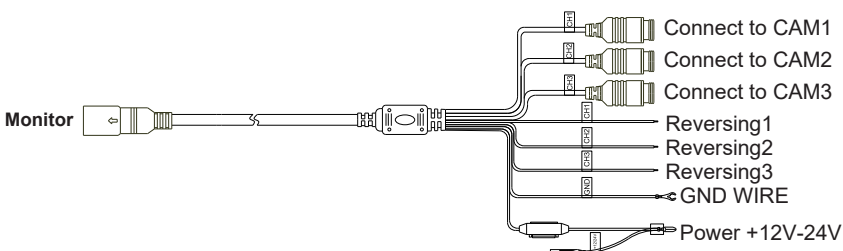

● Menu Setting Introduction

Press the MENU button to enter the OSD menu. Press the MENU button repeatedly to switch between different menu options.


Press the CAM button to select the desired setting item.

Press the ▲ / ▼ buttons to adjust the selected value.

The settings will be saved automatically after exiting the menu.

Note: When the OSD menu is not displayed, press the ▲ / ▼ buttons to adjust the volume level.









Picture Setting

Brightness: Select Brightness in the Picture menu, then press the ▲ / ▼ buttons to adjust the image brightness level (0–100).

Contrast: Select Contrast in the Picture menu, then press the ▲ / ▼ buttons to adjust the image contrast level (0–100).

Saturation: Select Saturation in the Picture menu, then press the ▲ / ▼ buttons to adjust the color saturation level (0–100).

Reset: Select Reset in the Picture menu to restore picture settings to factory default values.

Features

Parking Guidelines: Select CH1/CH2/CH3 GUIDES in the Features menu, then press the ▲ / ▼ buttons to enable or disable the parking guidelines.

Reversing Delay: Select CH1/CH2/CH3 DELAY in the Features menu, then press the ▲ / ▼ buttons to adjust the reversing delay time.

System Setting

Language: Select Language in the System Setting menu, then press the ▲ / ▼ buttons to select the desired OSD language.

Auto Bright: Select Auto Bright in the System Setting menu, then press the ▲ / ▼ buttons to enable or disable automatic brightness adjustment.

Flip Vertical: Select Flip Vertical in the System Setting menu, then press the ▲ / ▼ buttons to flip the image vertically.

Mirror Image: Select CH1/CH2/CH3 MIRROR in the System Setting menu, then press the ▲ / ▼ buttons to enable or disable the mirror image function.

Volume Setting

Select Volume in the Volume menu, then press the ▲ / ▼ buttons to adjust the speaker volume level (0–40).

● Announcements

To ensure our safety,the driver should not watch the video files or operate the monitor.The amateurish workers should not disassemble it without permission.If there are any product problems, please consult the local after-sales agency or take the defective product to the local maintenance department for repairing.

Warning: Please obey the local laws to install the product at a right position. Our company is not responsibility for the law issue caused by the illegal installing.

Attention: When the weather is very cold. The LCD may be dark with power on. After the temperature will increase gradually, the LCD should be back to normal.