




Installation Steps

1. remove the key from ignition
2. Remove factory radio and unplug the factory radio



3. Plug in the grey plugs on the harness

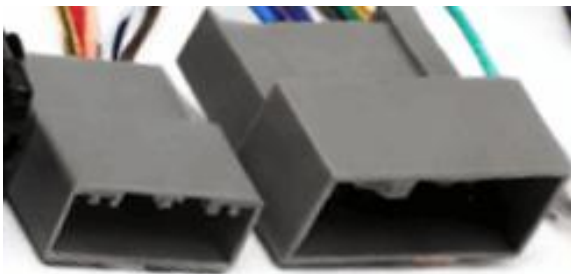

4. Fit the camera orientation switch

(possible good location)



5. (optional)

Fit the clock reset switch

Note: activating the switch will reset the time to 01:00, this is the only function of the switch



possible good location

find purple cable in the back of the radio loom, (wire with red connector)



Cut the cable and connect the switch into it


6. connect the loose wires in the harness to the corresponding wires from the new head unit / radio




7. If required to power the aerial cable, connect to this blue wire from our harness.



8. Use iso blocks to power new radio via the radio specific harness

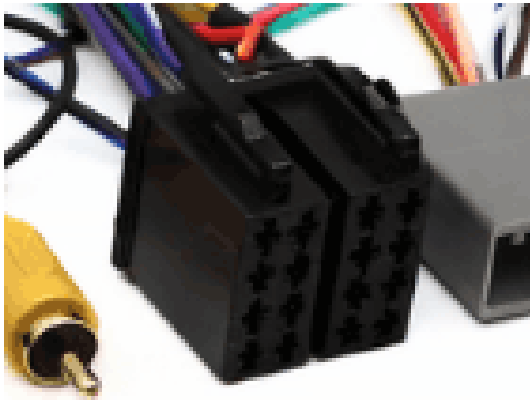

9. Follow instructions with the patch lead to power steering wheel controls

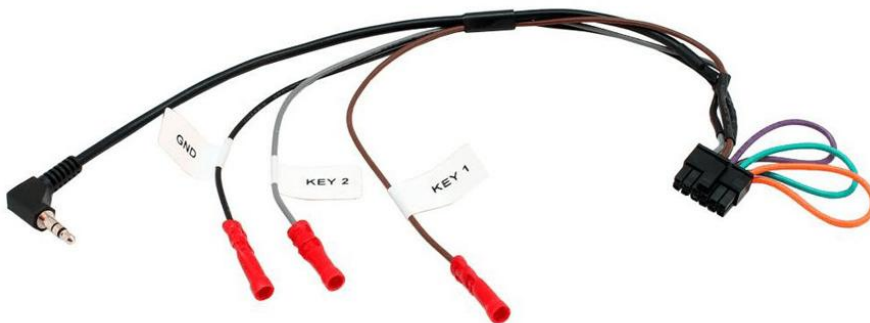

Need Technical Support?

Message our team on Whatsapp: 07770 814 793

Send your questions and photos so we can help you as quickly as possible.



Chat on WhatsApp